



CLADDING

INSTALLATION GUIDELINES



We  to
Talk wood!

THANK YOU FOR YOUR
PURCHASE!

SOLIDWOOD®
Natural - Durable - Sustainable

Congratulations with your new Solid Wood Cladding!
We have prepared this presentation for your Cladding
installation guide.

We are available for any further questions that you
may have, and we thank you for your purchase.





CEILING CLADDING INSTALLATION METHOD

Installation team ensures the safe and high-quality installation of your solid wood cladding.



Installation of Boards onto Metal furring

- The minimum thickness of plywood which can be used to install on a metal furring is 1/2". Level the plywood as necessary. Put additional support or at least shorten the gap of spacing of the hanger to hold the weight of the planks and Maximum 400mm spacing of Hangers.



SOLIDWOOD®
Natural - Durable - Sustainable

Ceiling attributes

Position



- Lighting must be marked or a mock-up of the lighting placement at the substrate, as well as sprinklers and smoke detector before the installation of the ceiling boards/planks.




SOLIDWOOD[®]
Natural - Durable - Sustainable



Installation

- The minimum thickness of plywood which can be used to install on a furring is 1/2" Level the plywood as necessary.
- ask for technical help if you will put additional support to avoid or at least shorten the gap of spacing of the hanger to hold the weight of the planks.

SOLIDWOOD®
Natural - Durable - Sustainable

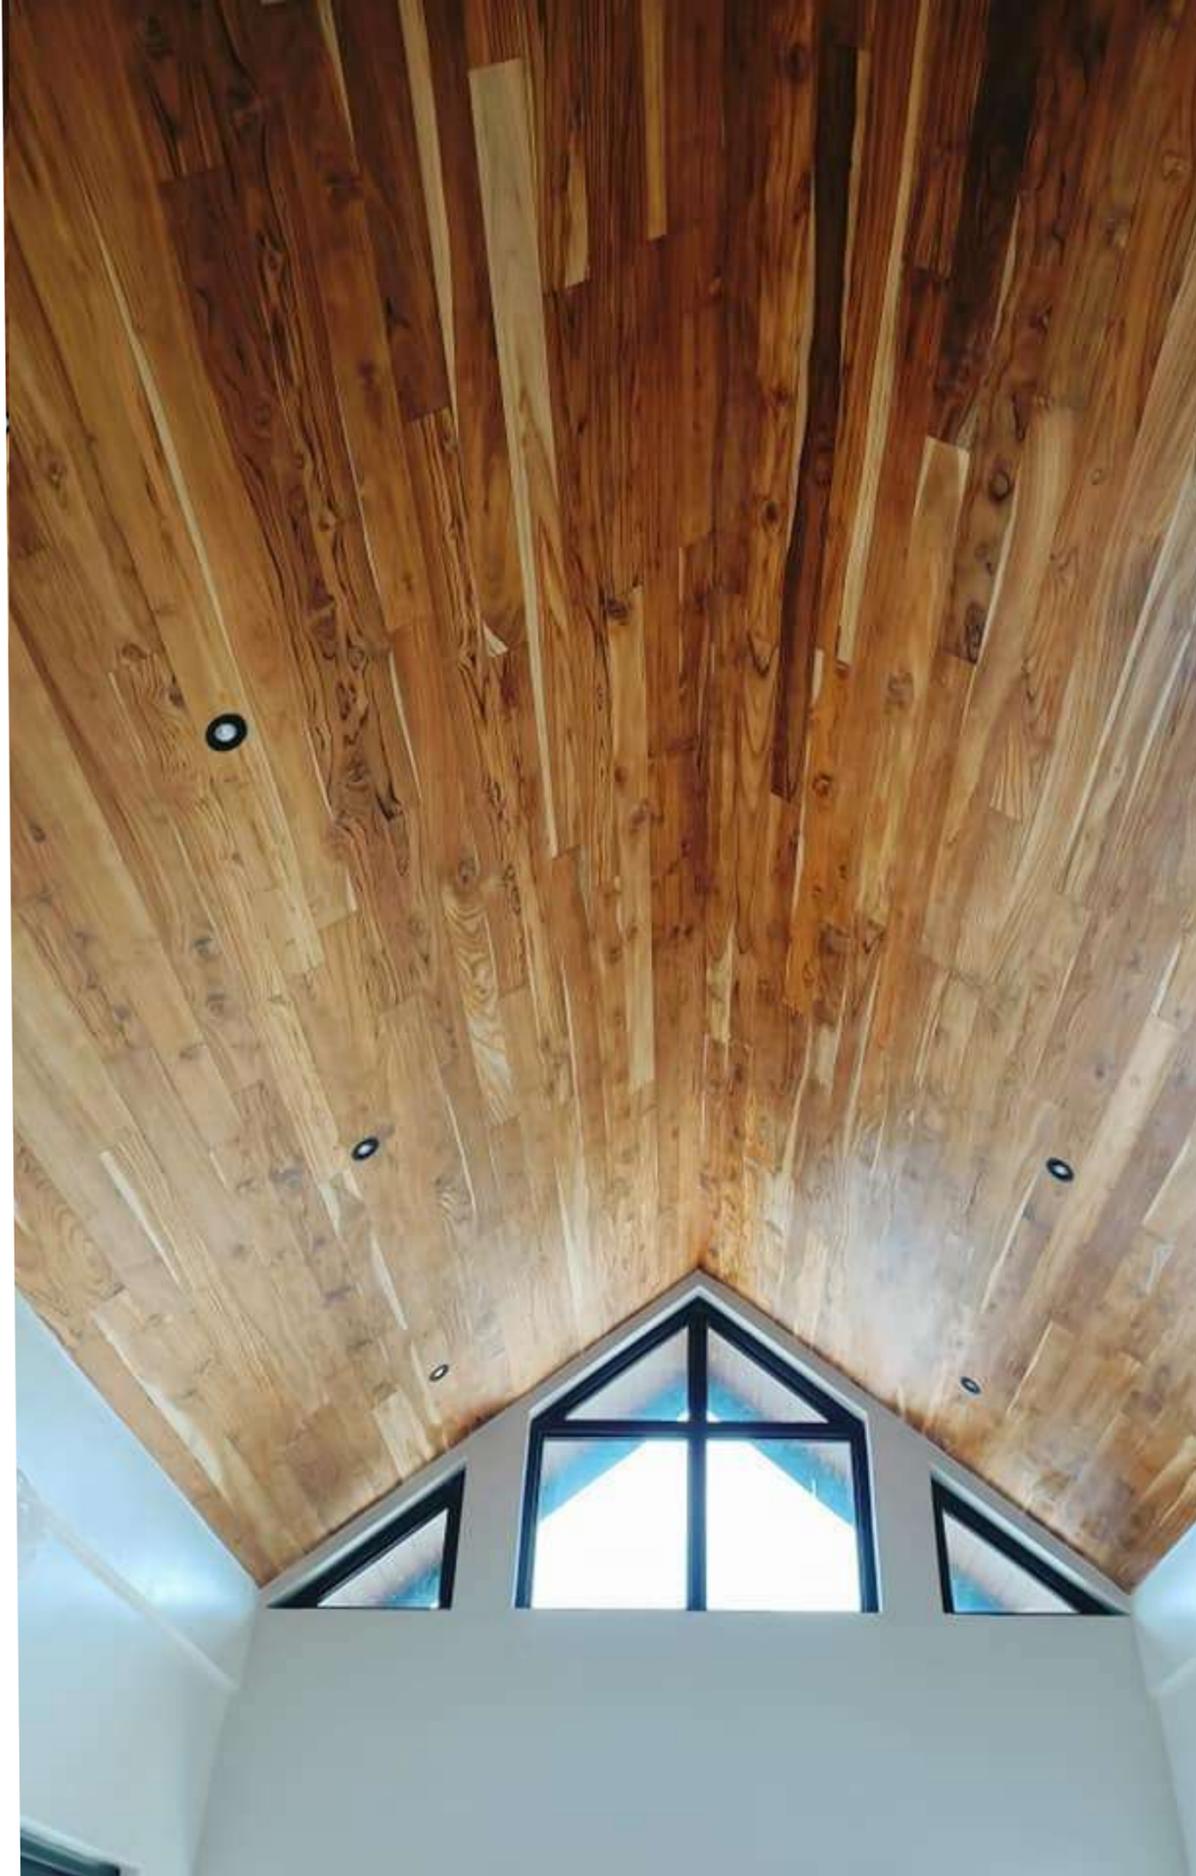

SOLIDWOOD[®]
Natural - Durable - Sustainable



WALL CLADDING INSTALLATION GUIDE

Installation team ensures the safe and high-quality installation of your solid wood cladding.

INTERIOR

- Installation of 1/2" plywood to the wall
- Installation of wood planks.



EXTERIOR

- Installation of Battens or Nailers.
- Installation of wood planks.



SOLIDWOOD®

Natural - Durable - Sustainable



SOLIDWOOD brand is fully owned by FILTRA Timber, the Philippines' leading importer/distributor of sustainable timber products.

www.filtratimber.com